

RUTC50



RUTC50 360° VIEW

YOUR 5G WIRELESS MULTITool

The RUTC50 is a 5G router featuring dual-band Wi-Fi 6 technology with multi-user MIMO, ensuring ultra-high cellular speeds of up to 3.4 Gbps. This 5G router is also equipped with dual SIM with auto-failover, five Gigabit Ethernet ports, and GNSS for precise location tracking. The RUTC50 supports both SA and NSA 5G architectures and is backward compatible with 4G (Cat 20) and 3G, ensuring robust and reliable performance



5G

Ultra-high cellular speeds of up to 3.4 Gbps

Wi-Fi 6

Dual-band multi-user MIMO wireless capabilities

PROCESSING POWER

Increased processing capacity for multi-user and edge computing applications

DUAL SIM

With auto-failover, backup WAN, and other switching scenarios



RMS

REMOTE
MANAGEMENT
SYSTEM

COMPATIBLE WITH RUTC50

MANAGEMENT

ALERTS

CONFIGURATION

ACCESS

FOTA

KEY FEATURES


HARDWARE

Mobile	5G Sub-6GHz SA/NSA 2.4/3.4Gbps DL (4x4 MIMO), 900/550 Mbps UL (2x2); 4G (LTE) - LTE Cat 20 2.0Gbps DL, 210Mbps UL; 3G - 42 Mbps DL, 5.76Mbps UL
CPU	Mediatek, Dual-core, 1.3 GHz, ARM Cortex A53
RAM	512MB DDR3
Storage	16MB serial NOR flash, 512MB serial NAND flash
Powering options	4-pin industrial DC power socket, 9 - 50 VDC
SIM	2 x SIM slots (Mini SIM - 2FF), 1.8 V/3 V, external SIM holders, eSIM (Optional)
Antenna connectors	4 x SMA for Mobile, 3 x RP-SMA for Wi-Fi, 1 x SMA for GNSS
Ethernet	5 x RJ45 ports, 10/100/1000 Mbps
WiFi	802.11b/g/n/ac/ax (Wi-Fi 6) with data transmission rates up to 2402Mbps on 5GHz, 576Mbps on 2.4GHz (Dual Band, MU-MIMO)
GNSS	GPS, GLONASS, BeiDou, Galileo and QZSS
Inputs/Outputs	1 x Digital Input, 0 - 6 V detected as logic low, 8 - 50 V detected as logic high, 1 x Digital Output, Open collector output, max output 50 V, 300 mA
Other	1 x USB A port for external devices, 1 x Grounding screw
Status LEDs	4 x WAN status LEDs, 3 x Mobile connection type, 3 x Mobile connection strength, 8 x LAN status, 1 x Power, 2 x 2.4G and 5G Wi-Fi, 2 x WAN status
Operating temperature	-40 °C to 75 °C
Housing	Anodized aluminum housing and panels
Dimensions (W x H x D)	130.4 x 42.6 x 103.4 mm
Weight	452 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	SIM switch, Status, SMS, USSD, Black/White list, Multiple PDN, Band management, APN, Bridge, Passthrough, Framed routing
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SFTP, FTP, SMTP, SSL/TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SMPP, SNMP, MQTT, Wake On Lan (WOL)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard, Tinc, Tailscale
Monitoring and Management	WEB UI, FOTA, SSH, SMS, Call, TR-069, MQTT, SNMP, JSON-RPC, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	Captive portal (Hotspot), internal/external Radius server, SMS authorization, internal/external landing page, walled garden, user scripts, URL parameters, user groups, individual user or group limitations, user management, 9 default customizable themes
GNSS	GPS, GLONASS, BeiDou, Galileo and QZSS

FRONT VIEW

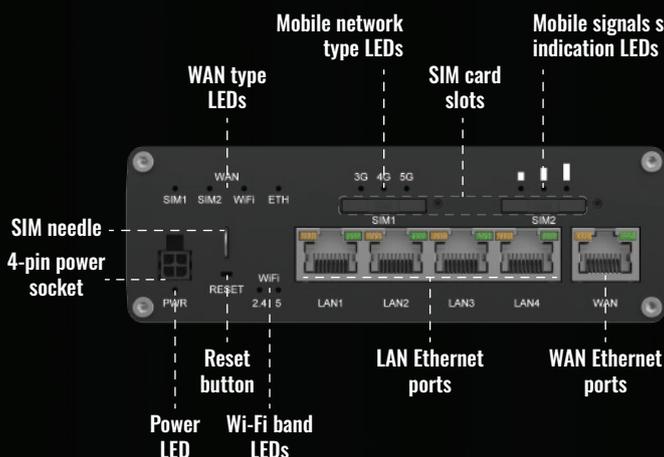

BACK VIEW

